


## LOCATION OF CONTROLS



## OWNER'S MANUAL AND OPERATING INSTRUCTIONS

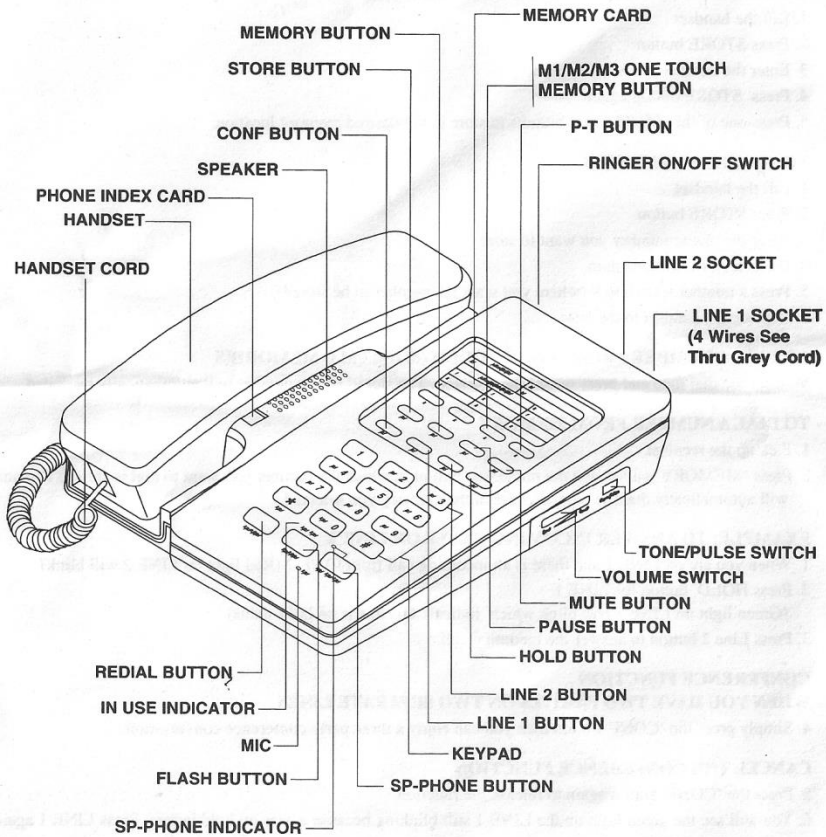

- 2-LINE HANDS-FREE SPEAKERPHONE
- 3-PARTY CONFERENCE
- 13 MEMORY SPEED DIALING
- HEARING AID COMPATIBLE

## CAUTION

This product is an electrical device and can be hazardous if immersed in water. To avoid possibility of electrical shock, do not use it while in the bathtub or shower or when you are wet. If you accidentally drop it into water, first unplug its cords from the modular jack, then remove the equipment from the water.

## OPERATION INSTRUCTION

### TONE/PULSE SELECTOR

Select the type of dialing that desire or that your telephone system requires.

- \* TONE... The unit will operate using tone dialing.
- \* PULSE... The unit will dial using rotary dial type pulses.

### RINGER ON/OFF

Select the desired function of the tone ringer.

- \* OFF... The tone ringer does not sound, for undisturbed privacy.
- \* ON... Normal setting rings on incoming calls.

### MAKING CALLS AS A NORMAL TELEPHONE

1. Select the desired dialing mode with the Tone/Pulse selector. (Do this only tone)
2. Select which line by pressing 'LINE 1' OR 'LINE 2' button
3. Pick up the handset or press 'SP-PHONE' button and wait for a dial tone.
4. Dial your call.

### RECEIVING CALLS AS A NORMAL TELEPHONE

When the phone rings, red light will link which indicate which is has an incoming call

1. Lift the handset and speak into the mouth piece of the handset
2. Hang up the handset to release the telephone line when conversation is completed.

### USE A SPEAKER-PHONE PHONE

Press the 'SP-PHONE' button, the red light on top of the button will light, the unit is ready for use as a speakerphone without picking the 'handset'. You can talk to the caller via 'MICROPHONE' and hear from the 'SPEAKER' the sound level can be adjusted by sliding the volume control.

### HANDSFREE ANSWERING

Be sure to notify the other party that you are using the speakerphone mode, the other party may not wish anyone else to hear the conversation.

1. Press the SPEAKERPHONE button and the indicator lights and begin to speak-also the in-in-use indicator lights.

### IN USE INDICATOR

This bulb will light if you lift the receiver-showing you the phone is connected properly and will remind you the handset if off the hook or not sealed in the base properly.

### LAST NUMBER REDIALING

The last number you called can be redialed automatically. This is useful especially if lines on busy.

1. Get a new dial tone and press REDIAL button.
2. To get a new dial tone press the HOOK SWITCH or hang up the phone for 2 seconds. then press REDIAL. This phone will remember the last number dialed even overnight.

### HOLD BUTTON

To put your party on hold position, press 'HOLD' button.  
Press LINE 1 or LINE 2 button and speak to the calling party.

### PAUSE BUTTON

In some case, such as PABX or 'for some' long distance services, a pause should be dialing sequence. The unit provides a stackable pause function (3.6 sec/pause).

### MUTE BUTTON

To temporarily prevent the other party from hearing another conversation, press 'MUTE' button, and keep it pressed down. Release the button to resume your phone conversation.

### FLASH BUTTON

To return to the dial tone while using the phone, simply press 'FLASH' button once.

### TO STORE 3-ONE-TOUCH (M1/M2/M3) MEMORIES

1. Lift the handset
2. Press STORE button
3. Enter the number you want to store
4. Press STORE button again
5. Press one of the (M1/M2/M3) buttons to store in the desired memory location.

### TO STORE 10 MEMORIES

1. Lift the handset
2. Press STORE button
3. Enter the phone number you want to store
4. Press STORE button again
5. Press a number from 0 to 9 (where you want the number to be stored)
6. Replace the handset to the base

### TO DIAL A NUMBER FROM 3-ONE-TOUCH (M1/M2/M3) MEMORIES

Wait for the dial tone and press one of the 3 button. The stored phone number will automatically be dialed.

### TO DIAL A NUMBER FROM MEMORY

1. Pick up the receiver
2. Press 'MEMORY' button and the numerical button in which the number you want to dial is stored. The unit will automatically dial the number store in the memory you selected.

### EXAMPLE: TO ANSWER INCOMING CALLS ON LINE 2

1. When you are on LINE 1 and there is an incoming call from LINE 2 (Red light on LINE 2 will blink)
2. Press HOLD button for LINE 1  
(Green light on LINE 1 will blink which indicate this line is on hold status)
3. Press Line 2 button to answer the incoming call.

### CONFERENCE FUNCTION

#### WHEN YOU HAVE TWO PARTIES ON TWO SEPARATE LINES

4. Simply press the 'CONF' button then you can enjoy a three party conference conversation.

### CANCEL THE CONFERENCE FUNCTION

5. Press the 'CONF' button again to release the function.
6. You will see the green light on the LINE 1 still blinking because it was on hold before. Press LINE 1 again to retrieve that party.

### 'P-T' KEY

During pulse dialing mode, the 'P-T' key provides automatic switching function from pulse mode to tone mode by pressing the 'P-T' key, me tone information can be stored into memory for autodial and redial functions.