


# BA-1000 Cable Replacement



This is a picture of the inside of your BA-1000. To get inside your unit, remove the 4 screws on the bottom of the BLACK panel and the 2 side screws (1 on each side of the BLACK panel).

## • Drive Cable Replacement


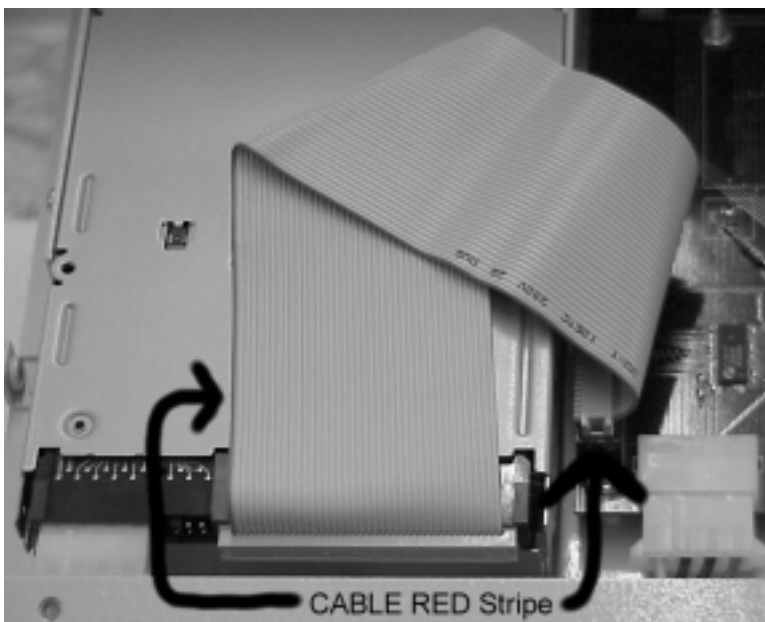



The drive cable only needs to be replaced if it doesn't look like the picture on the left. Remove the old cable, then install the new cable as illustrated, keeping the RED stripe of the cable at the designated locations.

# BA-1000 EPROM Replacement




This is a picture of the inside of your BA-1000. To get inside your unit, remove the 4 screws on the bottom of the BLACK panel and the 2 side screws (1 on each side of the BLACK panel). Use a flat blade screwdriver (straight edge).

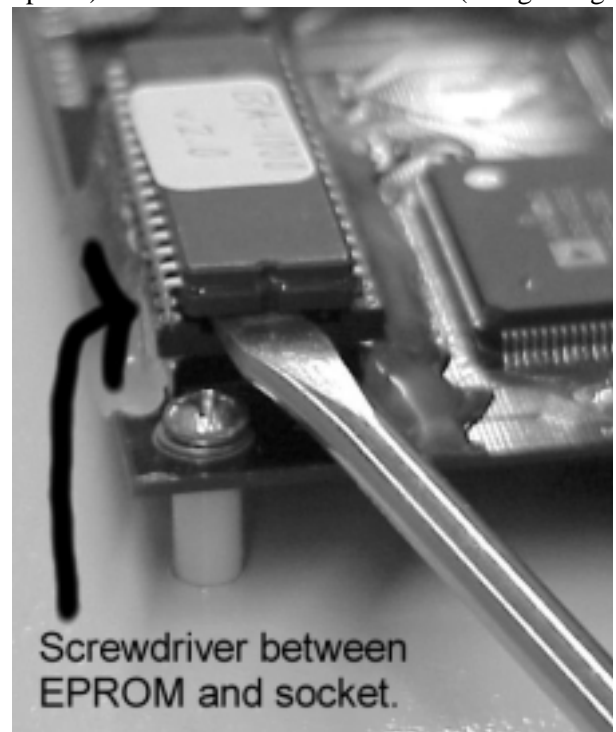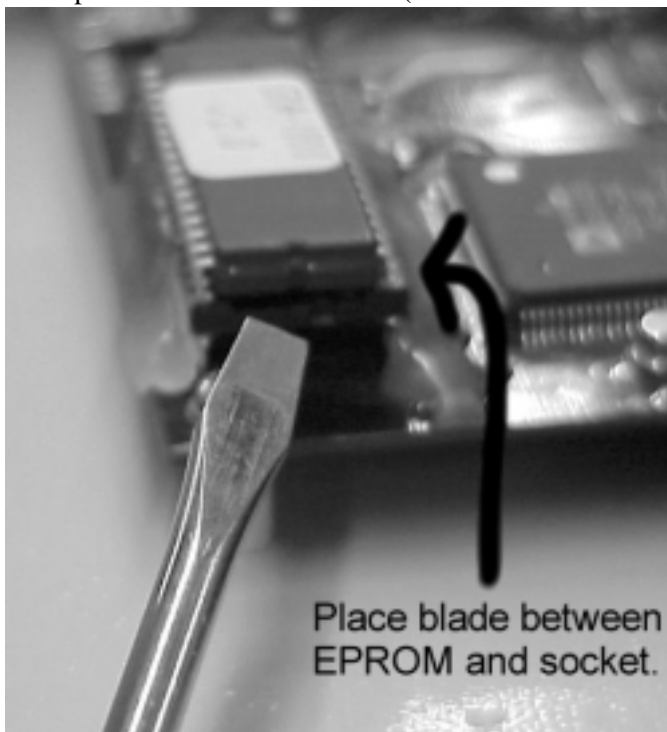


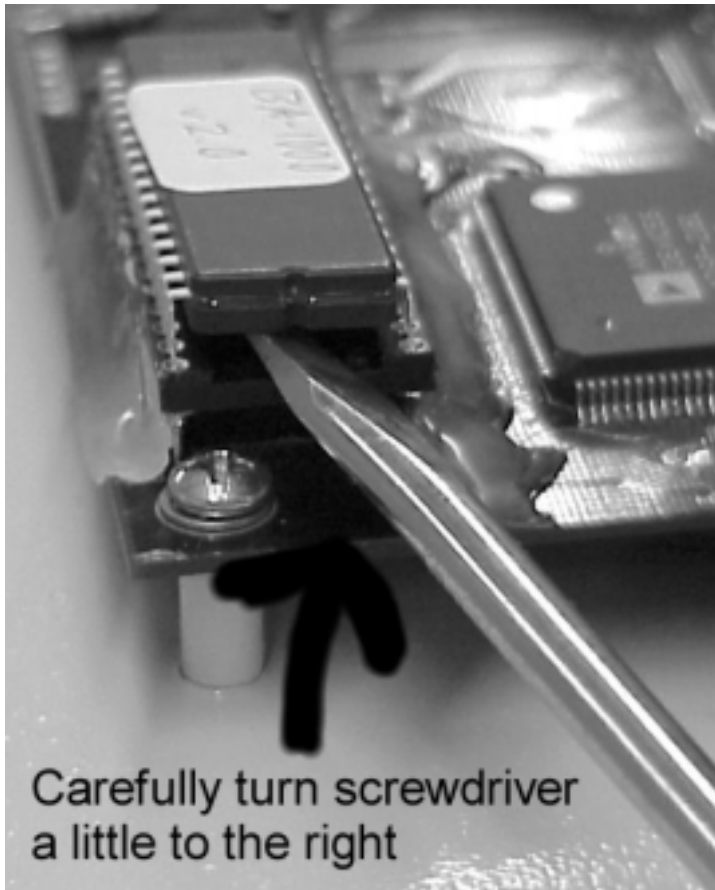


Carefully turn screwdriver a little to the right

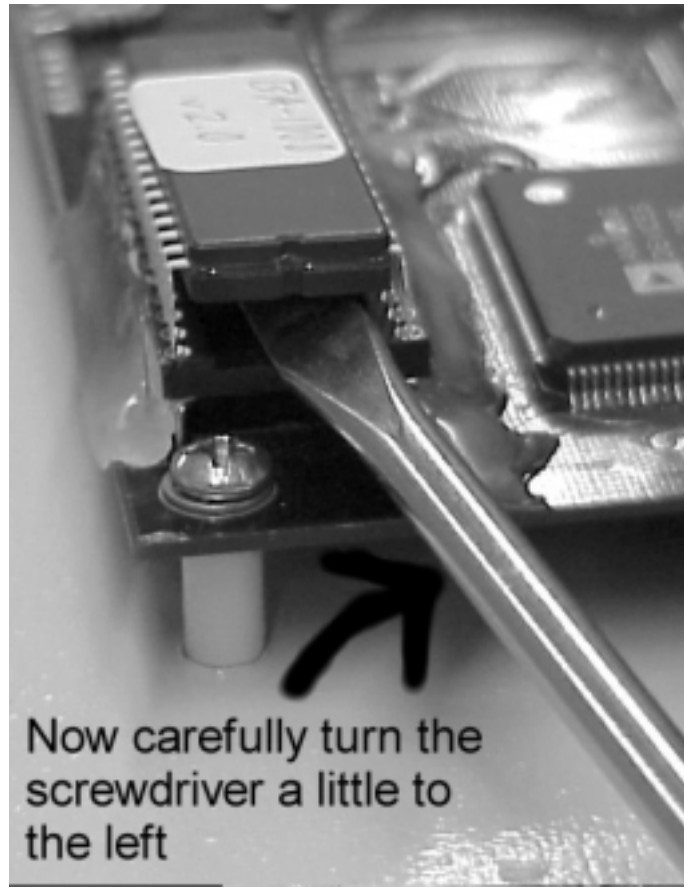


Now carefully turn the screwdriver a little to the left

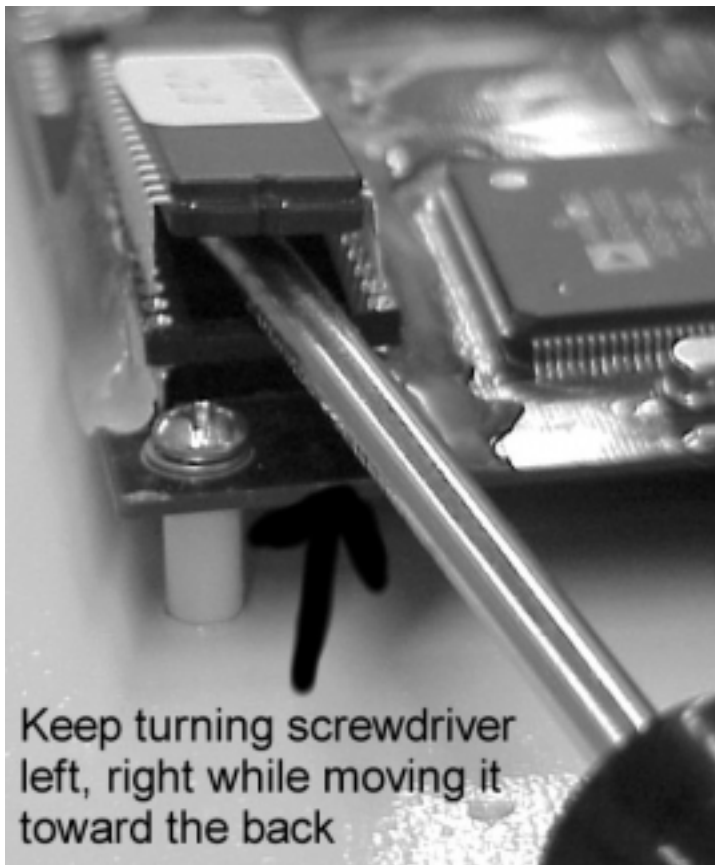

Keep turning screwdriver left, right while moving it toward the back

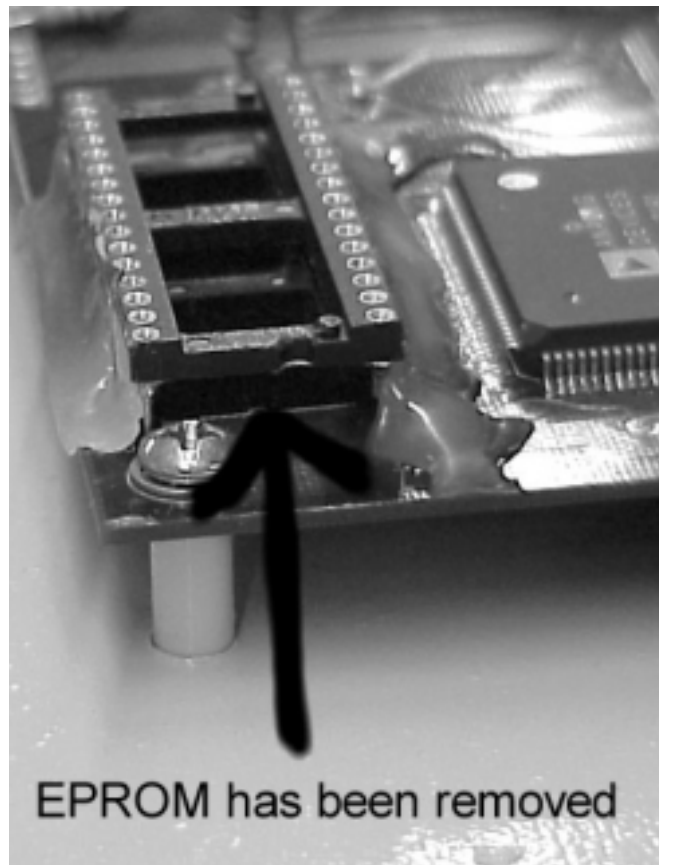

EPROM has been removed

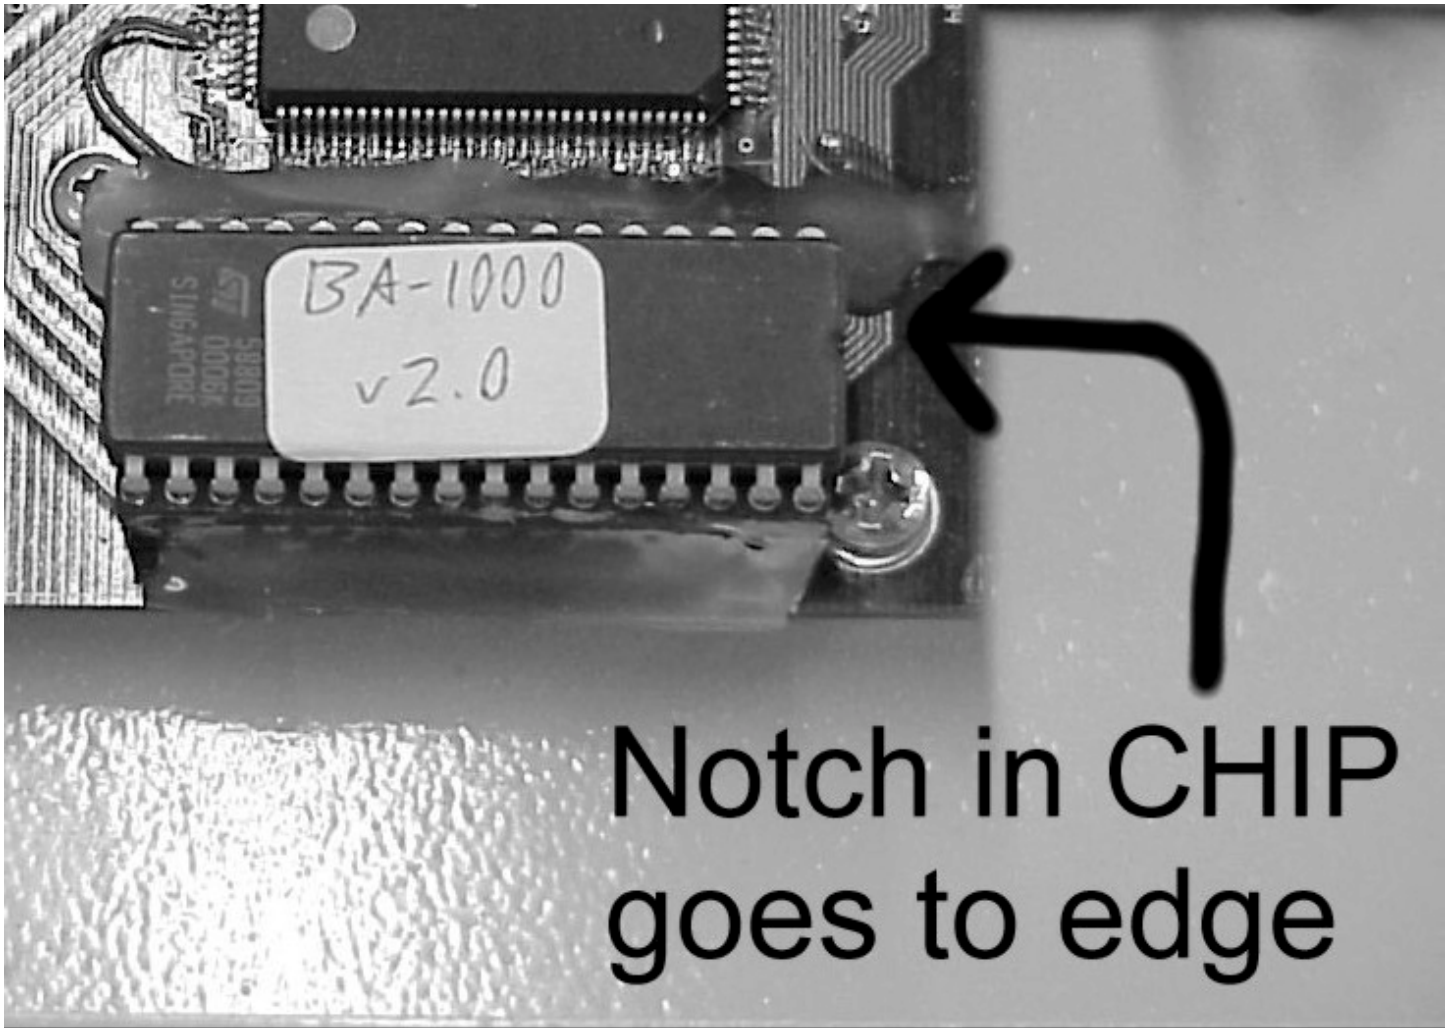

Now insert the new EPROM, keeping the notch, in the end of the chip, toward the edge of the circuit board.