


Thank you for purchasing the Skutch AS-703-M Promotion-On-Hold Module. With this Module, all calls that are placed "ON HOLD" will hear the Promotion-On-Hold audio. When the call is re-answered, the audio will automatically disconnect.


• Switch Selection

The first step is to set the SWITCH on the front panel of the AS-703-M so that it will work with your model of telephone. We suggest that you use a ball point pen to change the switch settings.


For: AT&T 944, 945, 955, 964, 974, 984, 90529, 90240, 90889, IBM/Bell/TT Systems 412, 412CID, 4900, Cortelco 4125, TP127S & PhoneMate PMG-4125





For AT&T 843, 853, 854, 874, 953, & 954




For Radio Shack #43-461(Model 612) and #43-463 (Model 212) & 1752.



For Uniden 420, UB-420, Intellitouch 420, ITC-420, SBC 420.

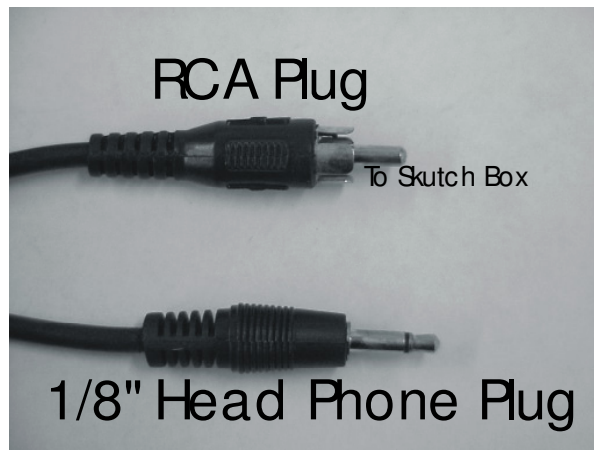

NOTE: Only use this cable when connecting to a CD player or Boom Box. For Digital players, use the cable that comes with them.

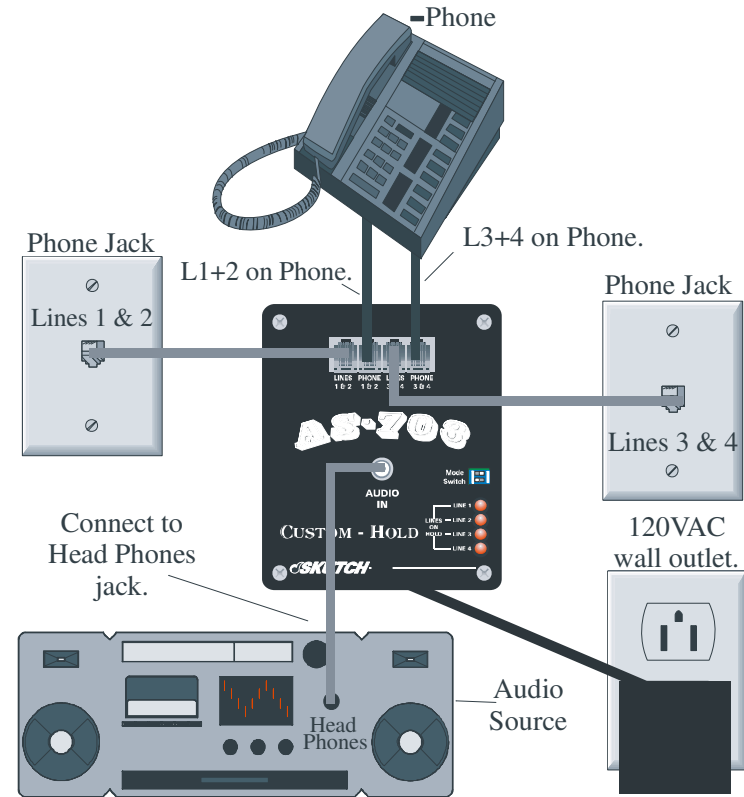

When a line is placed "ON HOLD", the corresponding LED on the AS-703-M will light indicating that audio is being coupled to that telephone line. The unit will play audio to all calls that are placed ON HOLD. Make sure that you adjust the level of the music to the proper level on the audio source.

• Troubleshooting Guide

No Audio But The Lights Turn On The AS-703-M

- Make sure the Message Source is playing.
- Make sure the Message Source volume is turned up.
- Make sure the audio cable is connected from the headphone jack on the Audio Source, to the AUDIO IN jack on the AS-703-M.
- Make sure the audio cable has the right plug for the AS-703-M (male RCA type).
- Make sure you are NOT using a "Dubbing" audio cord.

- Try reprogramming the station ID's for each of the phones, start with 22 and go down from there.

Music does not always shut OFF or turn ON.

- Re-program the STATION ID number in EACH telephone.
- **Tech Support - 916-786-6186**

If you have any problems getting the unit to work properly feel free to give us a call. Technical Support is available between the hours of 7:30 AM and 4:30 PM Pacific Time, Monday through Friday.

- **ONE YEAR LIMITED WARRANTY**

This SKUTCH PRODUCT is warranted against defects for a period of one (1) year from the date of the original invoice. Within this period, we will repair it without charge for parts and labor. To obtain warranty service the product must be returned, at the customer's expense, to SKUTCH Electronics along with a copy of the original invoice. After the unit has been repaired, SKUTCH will ship the PRODUCT back via UPS GROUND service at our expense. If any other form of return shipment is requested, the customer will pay for 100% of the shipping cost.


This Warranty does not apply if in the sole opinion of SKUTCH Electronics, the PRODUCT has been damaged by lightning or any other Acts of God, or by accident, misuse, neglect, or improper packing, shipping, modification or servicing by other than an authorized SKUTCH Service Center.

EXCEPT AS SPECIFICALLY PROVIDED IN THIS AGREEMENT, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND IN NO EVENT SHALL SKUTCH ELECTRONICS BE LIABLE FOR LOSS OF PROFITS OR BENEFITS, INDIRECT, SPECIAL, CONSEQUENTIAL OR OTHER SIMILAR DAMAGES ARISING OUT OF ANY BREACH OF THIS WARRANTY OR OTHERWISE.



"Telecommunication Products to solve Telecommunication Problems"

AS-703-M

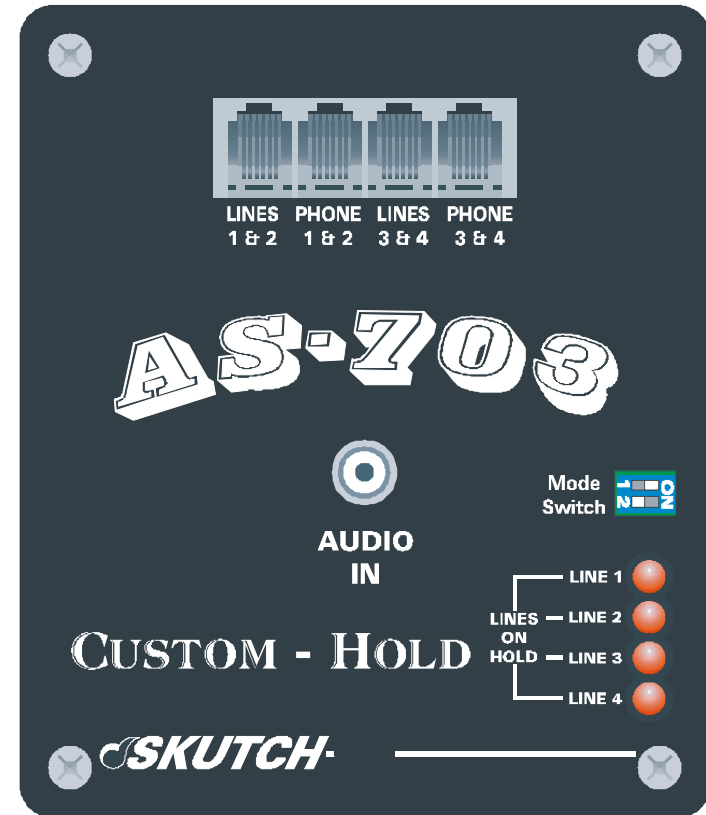

Four Line Promotion-On-Hold Module

V1.20